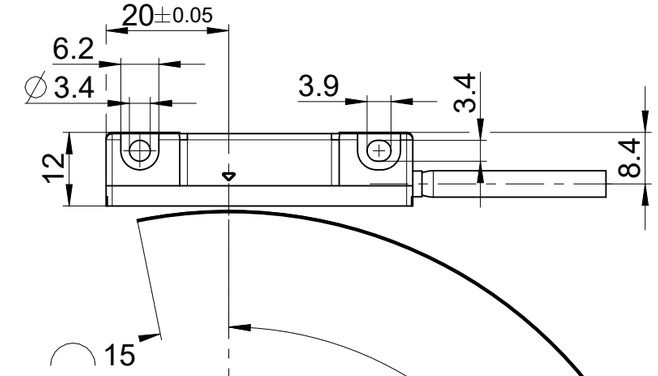


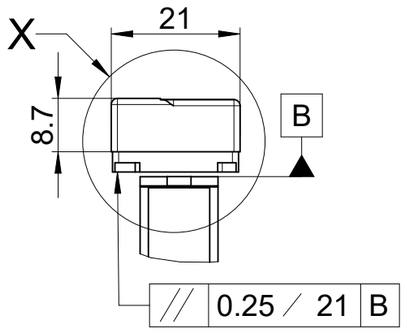


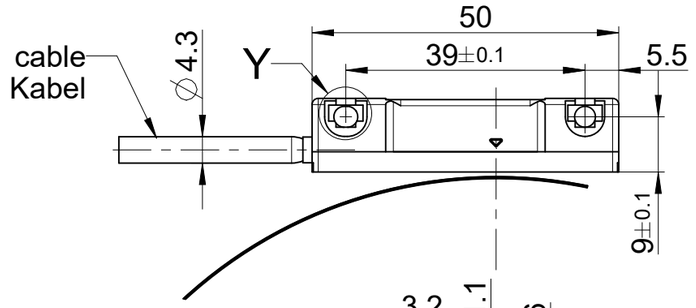


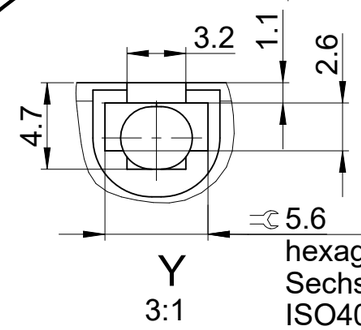


hexagon nut applicable
Sechskantmutter einsetzbar
ISO4032-M3

L = bearing
L = Lagerung

D = shaft diameter
D = Wellendurchmesser

k = any position of reference-mark from the beginning of the measuring length
k = beliebige Position der Referenzmarke vom Beginn des Messbereiches

j = additional refernce marks separated by n x 100mm
j = zusätzliche Referenzmarken im Abstand von n x 100mm

** D < ϕ 500 = +0,2mm/-0,1mm
** D ≥ ϕ 500 = +0,4mm/-0,2mm

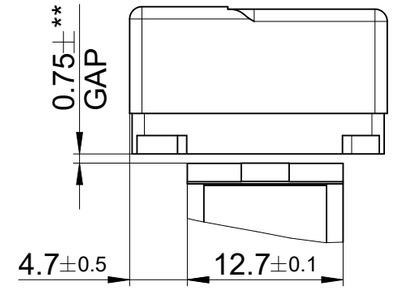


X
2:1

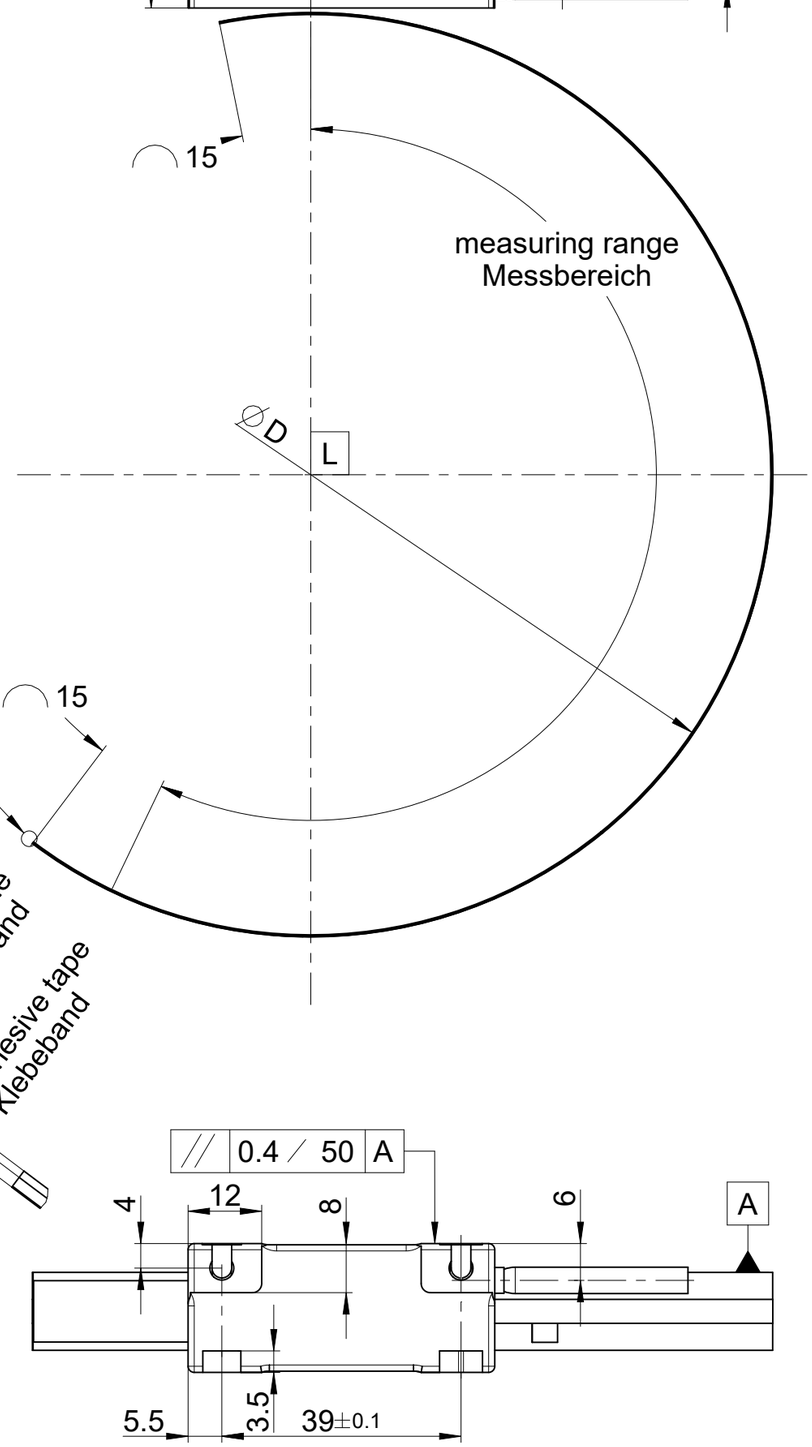


Z
10:1




representation streched
Darstellung gestreckt

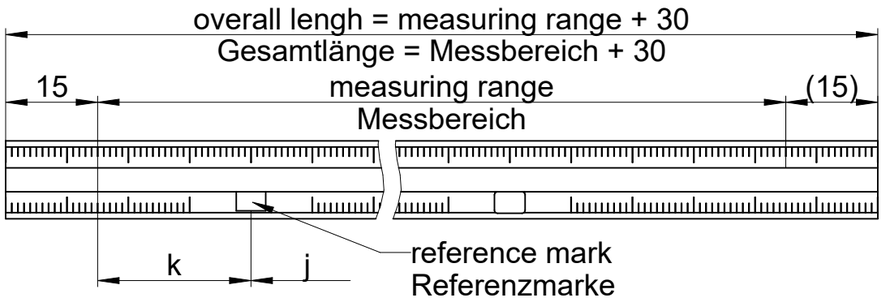


| | | | | |
|---|---|---|---|---|
| | | | | ID number: |
| | | | | Change No. C157360-25 |
| | | | | Phase: ~~Serie~~ |
| | Original drawing | | MSR45 MKS<br>MSR45 MKS<br>Anschlussmaße / Mating Dimensions | Tolerances as per ISO 8015 |
| Dimensions in mm | Scale 1:1 | Format A3 | | General Tolerances ISO 2768:1989-mH ≤ 6:±0.2 |

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. ( ISO 16016 )

RSF Elektronik
www.rsf.at

| Released | Version | Revision | Sheet | Page |
|---|---|---|---|---|
| 29.02.2024 | D | 680163-01 | C-01 | 1 of 1 |
| | Document number | | | |

1 213 928 A3