


Sicht auf die Buchsenseite

Pin	Belegung	Farbe
1	T2	rosa
2	T1	grün
3	nc	--
4	V+	schwarz
5	Schirm	Schirm
6	T2 invers	rot
7	T1 invers	gelb
8	nc	--
9	0V	weiß
Gehäuse	Schirm	Schirm

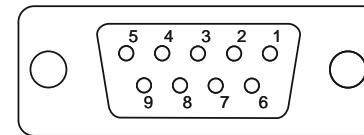

View on sockets

Pin	Signal	Color
1	T2	pink
2	T1	green
3	nc	--
4	V+	black
5	shield	shield
6	T2 inverse	red
7	T1 inverse	yellow
8	nc	--
9	0V	white
housing	shield	shield

connection layout TTL Hm

Pin Layout

Change C143857-06  
No:

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.  
Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)