
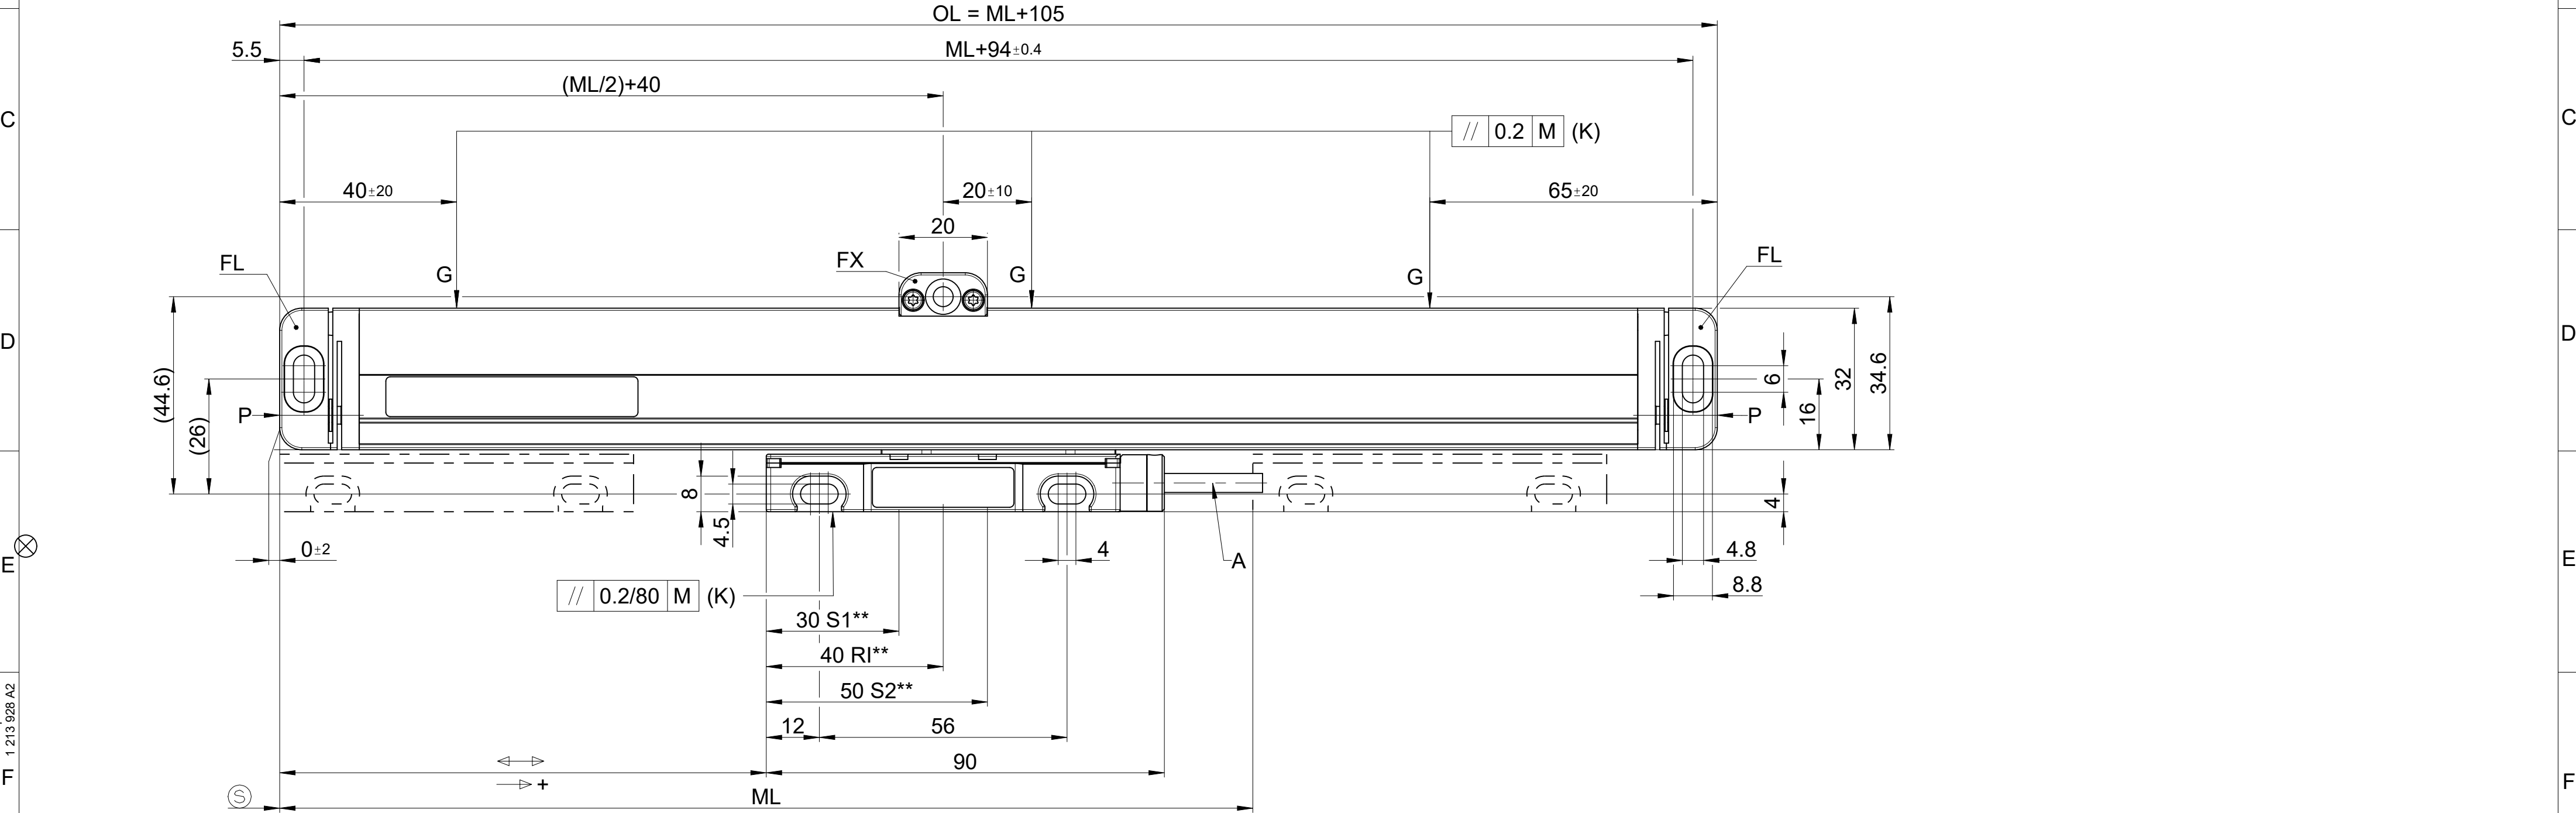
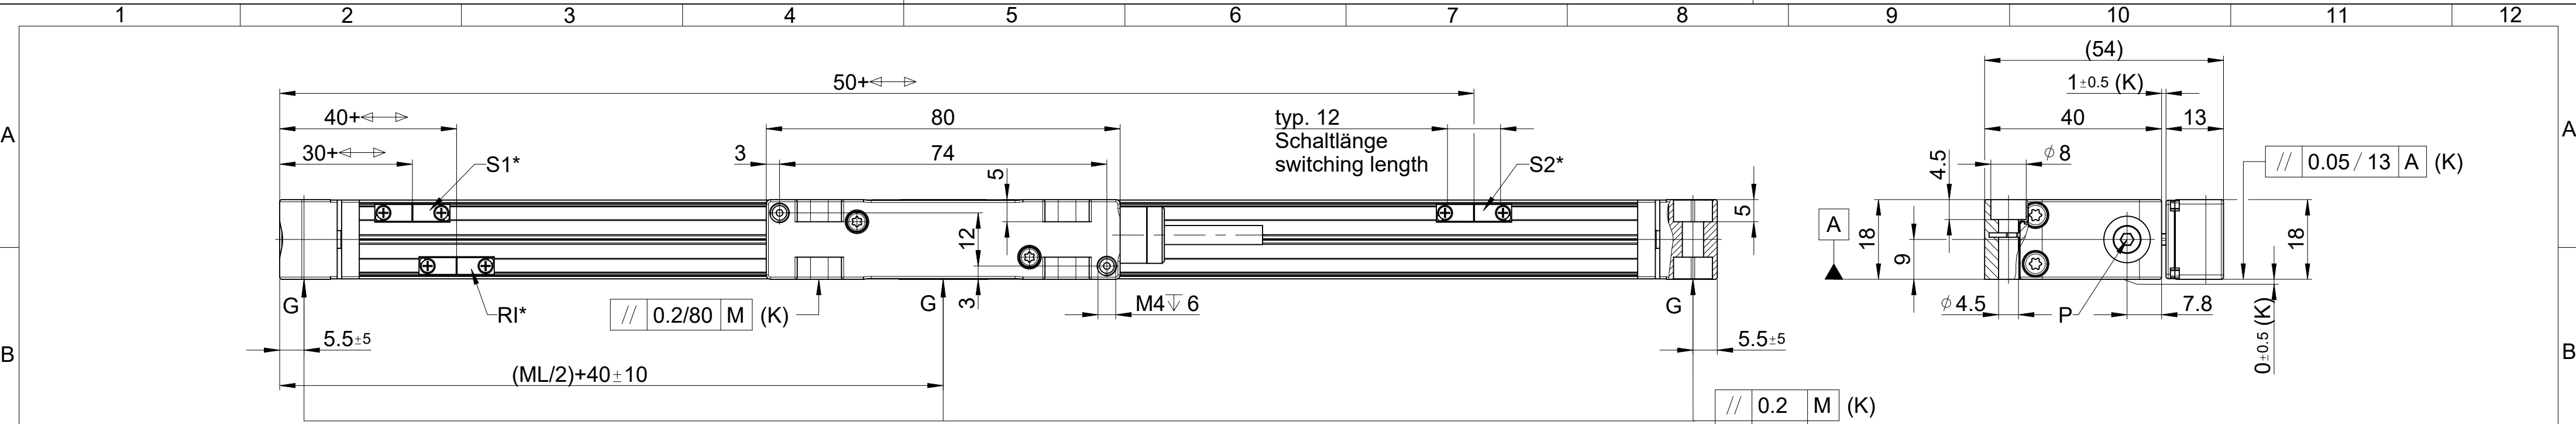




M = machine guideway / Maschinenführung
ML = measuring length / Messlänge
OL = overall length / Gesamtlänge
Ⓢ = beginning of the measuring length / Beginn der Messlänge
↔ = 0 ... ML
→ + = direction of motion of the scanning unit for ascending position values
Bewegungsrichtung des Abtastkopfes für steigende Positionswerte

K = customer mounting dimensions / kundenseitige Anschlussmaße

optional / Optionen
P = M5 air inlet / M5 Luftanschluss
S1, S2 = switch signals / Schaltsignale
RI = selectable reference mark / wählbare Referenzmarke
A = connecting cable / Anschlusskabel
* = actuator magnet / Schaltmagnet
** = sensor position / Sensorposition
FX = fixed mounting / festes Befestigungselement
FL = flexible mounting / flexibles Befestigungselement

					ID number: -							
					Change No. C157360-16							
					Phase: Serie							
		Original drawing		MSA720 MSA720 Anschlussmaße / Mating Dimensions								
		Scale	Format							Tolerances as per ISO 8015		
Dimensions in mm		1:1	A2	General Tolerances ISO 2768:1989-mH ≤ 6±0.2								
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)												
 www.rsf.at					Released		Version		Revision	Sheet	Page	
					23.11.2023		D 679227-01 - C-01					1 of 1
							Document number					